



- Intel® Celeron™ J1900 Quad Core 2,00 GHz
- 10.4" Projected Capacitive Multitouch Display (PCAP)
- Aluminum
- Made in Spain
- Fanless compact design



Intel®
Processors



Touch
Technology



Efficient Power
Consumption




Double
Display

CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.
Manufactured in Aluminium.
Projected Capacitive Multitouch sensor (PCAP).



Dimensions

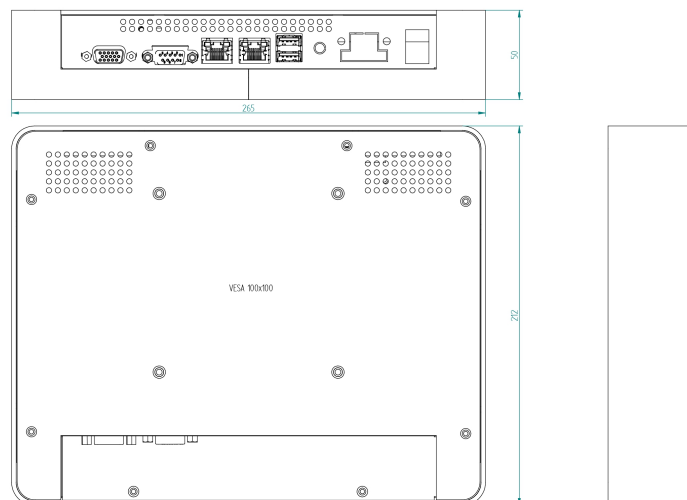

Specifications

| Display | |
|------------------|--|
| Touch technology | Projected Capacitive MultiTouch (PCAP) |
| Inches | 10,4" |
| Format | 4:3 |
| Resolution | 800 x 600 |
| Backlight | LED |
| Brightness | 400 cd/m2 |
| Ratio contrast | 700:1 |
| Angle vision | 160/140 |
| LED Life Time | 50.000 h |

| System | |
|------------|---|
| CPU | Intel® Celeron® J1900 Quad Core 2,00 GHz |
| Memory | 2Gb Scalable to 8Gb |
| Hard Drive | 60/120/240GB SSD. 500GB/1TB SATA. |
| Graphics | Intel® HD Graphics |
| Chipset | J1900 Onboard (SoC) |
| OS | Win7 Pro / Win7 Embedded / Win10 Pro / Win10 IoT Enterprise / Linux |

| Input / Ouput | |
|---------------|-----------------------------------|
| USB Ports | 1x USB 2.0 / 1x USB 3.0 |
| Serial Ports | 1x RS-232 |
| Ethernet | 2 x Realtek Giga Ethernet |
| Video | 1 x VGA |
| Audio | 1 x Audio output / 1 x Microphone |
| Expansión | 2 x Mini-PCIe |

| Mechanical | |
|------------|-------------------|
| Dimensions | 265 x 212 x 50 mm |
| Weight | 2 kg |
| Mount | VESA 100 x 100 |
| Panel cut | - |

| Optionals | |
|--------------|--|
| Screen | High brightness for outdoors use |
| USB Ports | 4 x USB 2.0 |
| Serial Ports | 4 x RS-232 / 1 x RS-232/485 |
| Modem | 3G / LTE + GPS |
| WIFI Module | Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth |
| Slot PCIe | To Be Consulted |
| Others | To Be Consulted |

| Protection / Environmental Conditions | |
|---------------------------------------|----------------|
| IP & Material | Aluminum Front |
| °C Operation | 0° a 60° C |
| °C Storage | -10° a 70° C |
| Humidity (no condensation) | 0% - 95% |

| Power Supply | |
|------------------------|--|
| Input Voltage | 12Vdc (External power supply 110-220Vac/12Vdc) |
| Optional Input Voltage | 24Vdc |