




- Intel Atom® x5-E3940 Quad Core 1,60 GHz
- 15" FLAT 5-Wire Resistive Touch Display
- Aluminum
- Made in Spain
- Fanless compact design



CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.
Manufactured in Aluminium.
Projected Capacitive Multitouch sensor (PCAP).



Dimensions

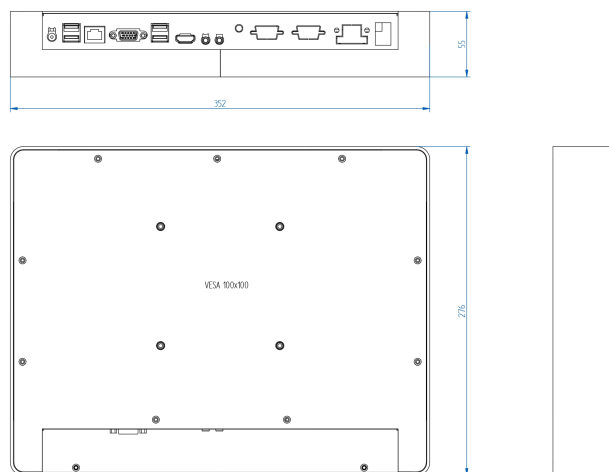

Specifications

| Display | |
|------------------|-----------------------|
| Touch technology | FLAT 5-Wire Resistive |
| Inches | 15" |
| Format | 4:3 |
| Resolution | 1024 x 768 |
| Backlight | LED |
| Brightness | 1000 cd/m2 |
| Ratio contrast | 1000:1 |
| Angle vision | 160/140 |
| LED Life Time | 70.000 h |

| System | |
|------------|--|
| CPU | Intel Atom® x5-E3940 Quad Core 1,60 GHz |
| Memory | 2Gb Scalable to 8Gb |
| Hard Drive | 60/120/240GB SSD. 500GB/1TB SATA. |
| Graphics | Intel® HD Graphics |
| Chipset | E3940 SoC Processor (TDP 10W/9.5W) |
| OS | Win10 Pro / Win10 IoT Enterprise / Linux |

| Input / Ouput | |
|---------------|---|
| USB Ports | 3 x USB 3.1 / 1 x USB2.0 |
| Serial Ports | - |
| Ethernet | 2 x Intel® Giga Ethernet |
| Video | 1 x HDMI |
| Audio | 1 x Audio output |
| Expansión | 1 x Mini-PCle / 1 x M.2 M-key (2242) / 1 x M.2 B-key (3042) |

| Mechanical | |
|------------|-------------------|
| Dimensions | 352 x 276 x 55 mm |
| Weight | 3,5 kg |
| Mount | VESA 100 x 100 |
| Panel cut | - |

| Optionals | |
|--------------|--|
| Screen | High brightness for outdoors use |
| USB Ports | 2 x USB 2.0 |
| Serial Ports | 1 x RS-232 / 1 x RS-232/422/485 |
| Modem | 3G / LTE + GPS |
| WIFI Module | Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth |
| Slot PCIe | To Be Consulted |
| Others | To Be Consulted |

| Protection / Environmental Conditions | |
|---------------------------------------|----------------|
| IP & Material | Aluminum Front |
| °C Operation | 0° a 60° C |
| °C Storage | -10° a 70° C |
| Humidity (no condensation) | 0% - 95% |

| Power Supply | |
|------------------------|-----------------------------------|
| Input Voltage | 9-36Vdc (External 110-220V/12Vdc) |
| Optional Input Voltage | - |