



- -
- 15.6" Projected Capacitive Multitouch Display (PCAP)
- Aluminium
- Made in Spain
- Compact design



Touch Technology



Efficient Power Consumption




Double Display

Manufactured in Aluminium.
Projected Capacitive Multitouch sensor (PCAP).



Dimensions

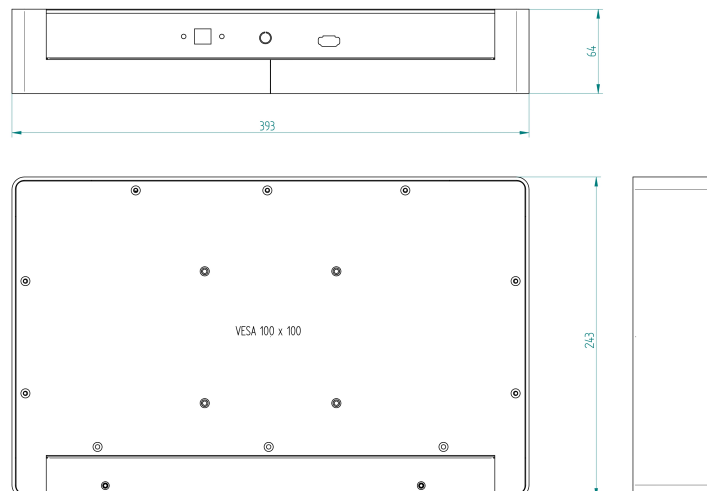

Specifications

| Display | |
|------------------|--|
| Touch technology | Projected Capacitive MultiTouch (PCAP) |
| Inches | 15,6" |
| Format | 16:9 |
| Resolution | 1366 x 768 |
| Backlight | LED |
| Brightness | 400 cd/m2 |
| Ratio contrast | 500:1 |
| Angle vision | 170/160 |
| LED Life Time | 50.000 h |

| System | |
|------------|---|
| CPU | - |
| Memory | - |
| Hard Drive | - |
| Graphics | - |
| Chipset | - |
| OS | - |

| Input / Output | |
|----------------|----------------------------|
| USB Ports | 1 x USB (Touch Controller) |
| Serial Ports | - |
| Ethernet | - |
| Video | 1 x HDMI |
| Audio | - |
| Expansión | - |

| Mechanical | |
|------------|-------------------|
| Dimensions | 393 x 243 x 64 mm |
| Weight | 6,5 kg |
| Mount | VESA 100 x 100 |
| Panel cut | - |

| Optionals | |
|--------------|----------------------------------|
| Screen | High brightness for outdoors use |
| USB Ports | Optional |
| Serial Ports | - |
| Modem | - |
| WIFI Module | - |
| Slot PCIe | - |
| Others | - |

| Protection / Environmental Conditions | |
|---------------------------------------|----------------|
| IP & Material | Aluminum Front |
| °C Operation | 0° a 60° C |
| °C Storage | -10° a 70° C |
| Humidity (no condensation) | 0% - 95% |

| Power Supply | |
|------------------------|--|
| Input Voltage | 12Vdc (External power supply 110-220Vac/12Vdc) |
| Optional Input Voltage | 12-36Vdc |