

IRTMWP215SJNDA

HYDRA-M - Full IP65 Industrial Monitor



- .
- 21.5" FLAT 5-Wire Resistive Touch Display
- Stainless Steel 316L
- IP66 Full Protection
- Compact design
- Made in Spain



Touch Technology



Efficient Power Consumption



Double Display



Manufactured in 316L Stainless Steel with Full IP66 enclosure.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).










Dimensions

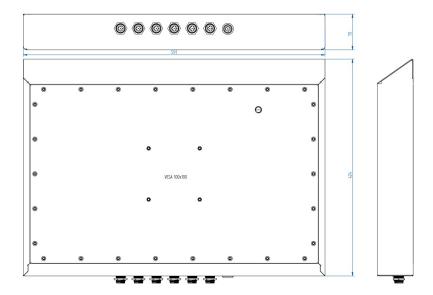



IRTMWP215SJNDA

HYDRA-M - Full IP65 Industrial Monitor

Specifications

Display		
Touch technology	FLAT 5-Wire Resistive	
Inches	21,5"	
Format	16:9	
Resolution	1920 x 1080	
Backlight	LED	
Brightness	250 cd/m2	
Ratio contrast	5000:1	
Angle vision	178/178	
LED Life Time	30.000 h	

System	
CPU	-
Memory	-
Hard Drive	-
Graphics	-
Chipset	-
OS	_

Input / Ouput		
USB Ports	1 x USB (Touch Controller)	
Serial Ports	-	
Ethernet	-	
Video	1 x HDMI	
Audio	-	
Expansión	-	

Optionals	
Screen	High brightness for outdoors use
USB Ports	Optional
Serial Ports	-
Modem	-
WIFI Module	-
Slot PCIe	-
Others	-

Protection / Environmental Conditions				
IP & Material	Full IP66 Stainless Steel 316L			
°C Operation	0° a 60° C TBC: -20° a 60° C (Atom)			
°C Storage	-10° a 70° C TBC: -20° a 70° (Atom)			
Humidity (no condensation)	0% a 95%			

Power Supply		
Input Voltage	12Vdc (External power supply 110-220Vac/12Vdc)	
Optional Input Voltage	12-36Vdc	