



- Intel® Core™ i3-4330TE 2,70 GHz
- 15,6" 5-Wire Resistive Touch Display
- Anodized Aluminum
- IP66 Front Protection
- Compact design
- Made in Spain



Intel®  
Processors



Touch  
Technology



Efficient Power  
Consumption



Double  
Display



IP66 Front  
Protection


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

IP66 Front Bezel protection, available in Anodized Aluminum or Stainless Steel.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

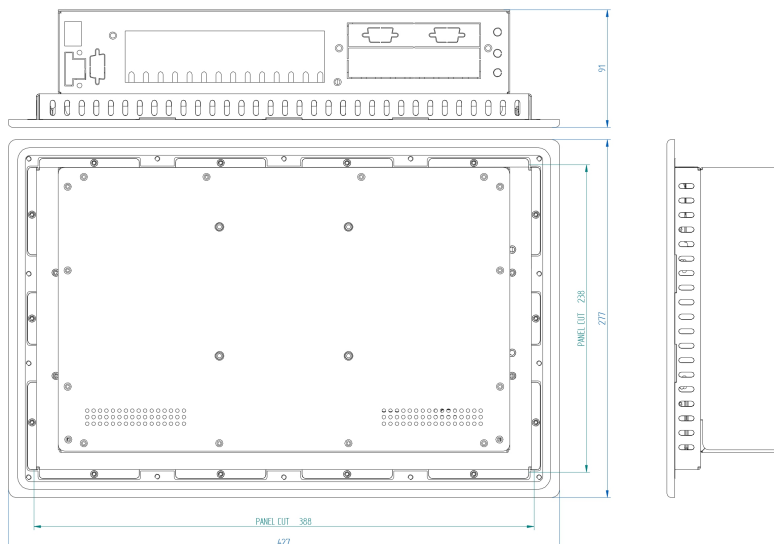

### Specifications

#### Display

Touch technology	5-Wire Resistive
Inches	15,6"
Format	16:9
Resolution	1920 x 1080
Backlight	LED
Brightness	450 cd/m2
Ratio contrast	800:1
Angle vision	160/160
LED Life Time	50.000 h

#### System

CPU	Intel® Core™ i3-4330TE (4th Generation) 2,70 GHz
Memory	2Gb Scalable to 16Gb
Hard Drive	60/120/240GB SSD. 500GB/1TB SATA.
Graphics	Intel® HD Graphics
Chipset	Intel® Q87 Express
OS	Win7 Pro / Win7 Embedded / Win10 Pro / Win10 IoT Enterprise / Linux

#### Input / Output

USB Ports	4x USB 3.0
Serial Ports	2x RS-232 / 1x RS-232/422/485
Ethernet	2 x Intel® Giga Ethernet
Video	1 x DVI-I / 1 x HDMI
Audio	1 x Audio output / 1 x Microphone
Expansión	2 x Mini-PCIe / 1 x PCIe4

#### Mechanical

Dimensions	427 x 277 x 91 mm
Weight	6,8 kg
Mount	Wall-Mount
Panel cut	388 x 238 mm

#### Optionals

Screen	High brightness for outdoors use
USB Ports	4 x USB 2.0 / 2 x USB 3.0
Serial Ports	2 x RS-232
Modem	3G / LTE + GPS
WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
Slot PCIe	To Be Consulted
Others	To Be Consulted

#### Protection / Environmental Conditions

IP & Material	IP66 Anodized Aluminum Front Bezel
°C Operation	0° a 60° C TBC: -20° a 60° C (Atom)
°C Storage	-10° a 70° C TBC: -20° a 70° (Atom)
Humidity (no condensation)	0% a 95%

#### Power Supply

Input Voltage	9-24Vdc (External power supply 110-220Vac/12Vdc)
Optional Input Voltage	-