



- Intel® Core™ i3-7100U 2,40 GHz
- 21.5" 5-Wire Resistive Touch Display
- Anodized Aluminum
- IP66 Front Protection
- Compact design
- Made in Spain



Intel®  
Processors



Touch  
Technology



Efficient Power  
Consumption



Double  
Display



IP66 Front  
Protection


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

IP66 Front Bezel protection, available in Anodized Aluminum or Stainless Steel.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

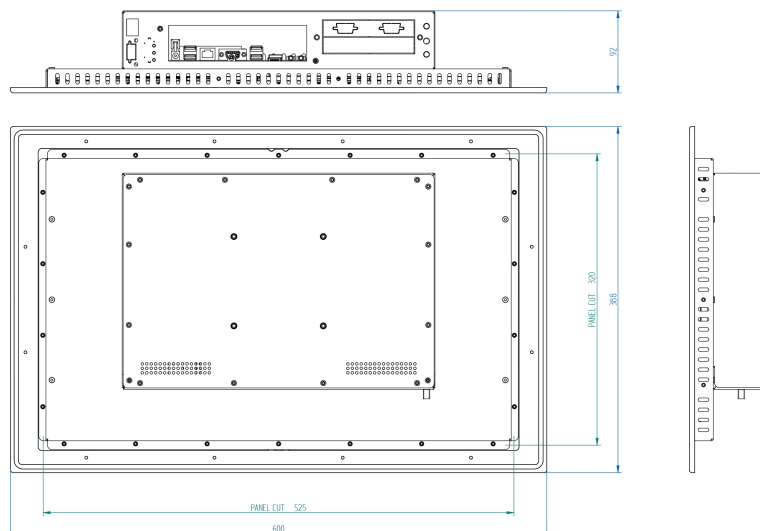

### Specifications

#### Display

Touch technology	5-Wire Resistive
Inches	21,5"
Format	16:9
Resolution	1920 x 1080
Backlight	LED
Brightness	1500 cd/m2
Ratio contrast	1000:1
Angle vision	178/178
LED Life Time	50.000 h

#### System

CPU	Intel® Core™ i3-7100U (7th Generation) 2,40 GHz
Memory	DDR4 2Gb Scalable to 16Gb
Hard Drive	60/120/240GB SSD. 500GB/1TB SATA.
Graphics	Intel® HD Graphics 620
Chipset	i3-7100U Onboard (SoC)
OS	Win10 Pro / Win10 IoT Enterprise / Linux

#### Input / Ouput

USB Ports	2 x USB 3.0
Serial Ports	-
Ethernet	2 x Realtek Giga Ethernet
Video	1 x VGA / 1 x HDMI
Audio	1 x Audio output / 1 x Microphone
Expansión	1 x Mini-PCIe / 1 x M.2(2242/2260) for SSD

#### Mechanical

Dimensions	600 x 388 x 92 mm
Weight	12 kg
Mount	Wall-Mount
Panel cut	525 x 320 mm

#### Optionals

Screen	High brightness for outdoors use
USB Ports	3 x USB 2.0 / 2 x USB 3.0
Serial Ports	2 x RS-232 selectable header 5V-12V / 10 x RS-232/422/485
Modem	3G / LTE + GPS
WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
Slot PCIe	To Be Consulted
Others	To Be Consulted

#### Protection / Environmental Conditions

IP & Material	IP66 Anodized Aluminum Front Bezel
°C Operation	0° a 60° C TBC: -20° a 60° C (Atom)
°C Storage	-10° a 70° C TBC: -20° a 70° (Atom)
Humidity (no condensation)	0% a 95%

#### Power Supply

Input Voltage	12Vdc (External power supply 110-220Vac/12Vdc)
Optional Input Voltage	-