



- Intel® Celeron™ J6412 Quad Core 2,00 GHz
- 12.1" Projected Capacitive Multitouch Display (PCAP)
- Anodized Aluminum
- IP65 Front Protection
- Fanless compact design
- Made in Spain



Intel®  
Processors



Touch  
Technology



Efficient Power  
Consumption



Double  
Display



IP65 Front  
Protection


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

IP65 Front Bezel protection, available in Anodized Aluminum or Stainless Steel.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

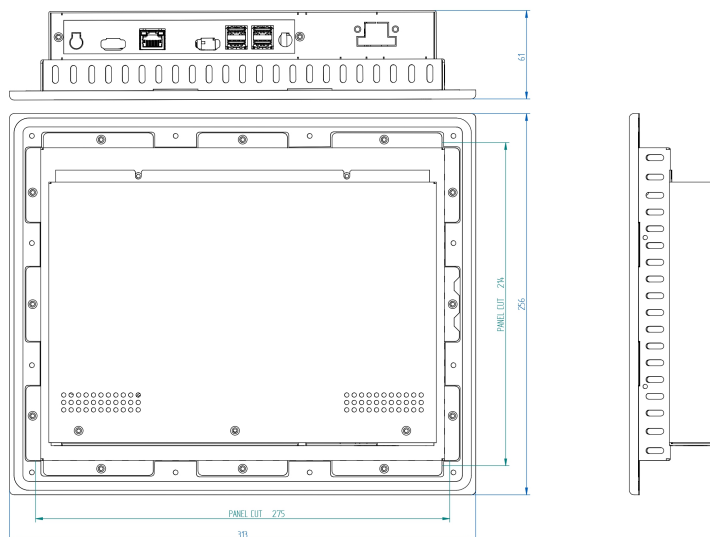

### Specifications

#### Display

|                  |                                        |
|------------------|----------------------------------------|
| Touch technology | Projected Capacitive MultiTouch (PCAP) |
| Inches           | 12,1"                                  |
| Format           | 16:9                                   |
| Resolution       | 1280 x 800                             |
| Backlight        | LED                                    |
| Brightness       | 1000 cd/m2                             |
| Ratio contrast   | 1000:1                                 |
| Angle vision     | 178/178                                |
| LED Life Time    | 70.000 h                               |

#### System

|            |                                          |
|------------|------------------------------------------|
| CPU        | Intel® Celeron™ J6412 Quad Core 2,00 GHz |
| Memory     | DDR4 2Gb Scalable to 16Gb                |
| Hard Drive | 60/120/240/480Gb SSD. 500Gb/1Tb SATA.    |
| Graphics   | Intel® HD Graphics                       |
| Chipset    | J6412 Onboard (SoC) TPM                  |
| OS         | Win10 Pro / Win10 IoT Enterprise / Linux |

#### Input / Ouput

|              |                                                            |
|--------------|------------------------------------------------------------|
| USB Ports    | 4 x USB 2.0 / 3 x USB 3.1                                  |
| Serial Ports | -                                                          |
| Ethernet     | 1 x Realtek Giga Ethernet                                  |
| Video        | 1 x HDMI                                                   |
| Audio        | 1 x Audio output / 1 x Microphone                          |
| Expansión    | 1 x M.2 (2242/2260) / 1 x M.2 (2230) / 1 x M.2 (3042/3052) |

#### Mechanical

|            |                   |
|------------|-------------------|
| Dimensions | 329 x 235 x 61 mm |
| Weight     | 2,9 kg            |
| Mount      | Wall-Mount        |
| Panel cut  | 289 x 193 mm      |

#### Optionals

|              |                                              |
|--------------|----------------------------------------------|
| Screen       | High brightness for outdoors use             |
| USB Ports    | 3 x USB 2.0                                  |
| Serial Ports | 4 x RS-232 / 2 x RS-232/422/485              |
| Modem        | 3G / LTE + GPS                               |
| WIFI Module  | Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth |
| Slot PCIe    | To Be Consulted                              |
| Others       | To Be Consulted                              |

#### Protection / Environmental Conditions

|                            |                                        |
|----------------------------|----------------------------------------|
| IP & Material              | IP65 Anodized Aluminum Front Bezel     |
| °C Operation               | 0° a 60° C<br>TBC: -20° a 60° C (Atom) |
| °C Storage                 | -10° a 70° C<br>TBC: -20° a 70° (Atom) |
| Humidity (no condensation) | 0% a 95%                               |

#### Power Supply

|                        |                                                |
|------------------------|------------------------------------------------|
| Input Voltage          | 12Vdc (External power supply 110-220Vac/12Vdc) |
| Optional Input Voltage | -                                              |