




IP65 Front Protection

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).

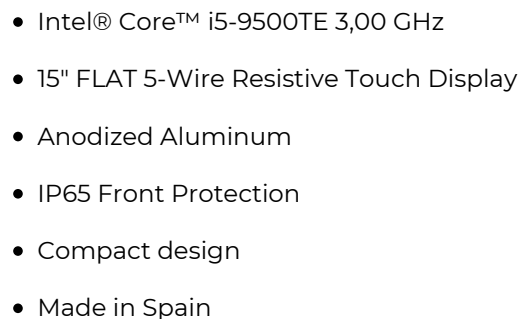

Dimensions



Specifications

Display

Touch technology	FLAT 5-Wire Resistive
Inches	15"
Format	4:3
Resolution	1024 x 768
Backlight	LED
Brightness	1600 cd/m2
Ratio contrast	800:1
Angle vision	160/150
LED Life Time	50.000 h

System

CPU	Intel® Core™ i5-9500E (9th Generation) 3,00 GHz
Memory	DDR4 2Gb Scalable to 32Gb
Hard Drive	60/120/240Gb SSD. 500Gb/1Tb SATA.
Graphics	Intel® HD Graphics
Chipset	Intel® Coffee Lake-S H310
OS	Win10 Pro / Win10 IoT Enterprise / Linux

Input / Output

USB Ports	4 x USB 3.0
Serial Ports	-
Ethernet	2 x Intel® Giga Ethernet
Video	1 x VGA / 1 x HDMI
Audio	1 x Audio output / 1 x Microphone
Expansión	1 x PCIe4 / 2 x M.2(2230/2242)

Optionals

Screen	High brightness for outdoors use
USB Ports	5 x USB 2.0
Modem	3G / LTE + GPS
WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
Slot PCIe	To Be Consulted
Others	To Be Consulted

Protection / Environmental Conditions

IP & Material	IP65 Anodized Aluminum Front Bezel
°C Operation	0° a 60° C TBC: -20° a 60° C (Atom)
°C Storage	-10° a 70° C TBC: -20° a 70° (Atom)
Humidity (no condensation)	0% a 95%

Power Supply

Input Voltage	12Vdc/19-24Vdc (External power supply 110-220Vac/12Vdc)
Optional Input Voltage	-