



- Intel® Celeron N2930 Quad Core 1,83 GHz
- 15" 5-Wire Resistive Touch Display
- Anodized Aluminum
- IP65 Front Protection
- Fanless compact design
- Made in Spain



Intel®  
Processors



Touch  
Technology



Efficient Power  
Consumption



Double  
Display



IP65 Front  
Protection


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

IP65 Front Bezel protection, available in Anodized Aluminum or Stainless Steel.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

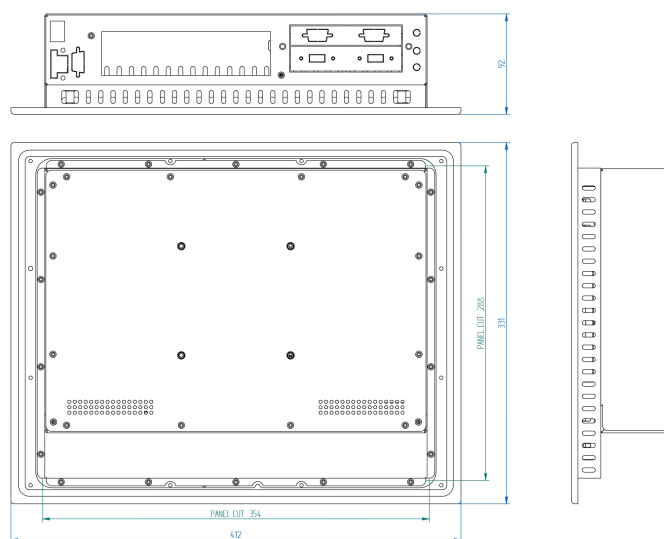

### Specifications

#### Display

|                  |                  |
|------------------|------------------|
| Touch technology | 5-Wire Resistive |
| Inches           | 15"              |
| Format           | 4:3              |
| Resolution       | 1024 x 768       |
| Backlight        | LED              |
| Brightness       | 300 cd/m2        |
| Ratio contrast   | 2000:1           |
| Angle vision     | 176/176          |
| LED Life Time    | 70.000 h         |

#### System

|            |                                                                     |
|------------|---------------------------------------------------------------------|
| CPU        | Intel® Celeron N2930 Quad Core 1,83 GHz                             |
| Memory     | 2Gb Scalable to 8Gb                                                 |
| Hard Drive | 60/120/240Gb SSD. 500Gb/1Tb SATA.                                   |
| Graphics   | Intel® HD Graphics                                                  |
| Chipset    | N2930 Onboard (SoC)                                                 |
| OS         | Win7 Pro / Win7 Embedded / Win10 Pro / Win10 IoT Enterprise / Linux |

#### Input / Ouput

|              |                             |
|--------------|-----------------------------|
| USB Ports    | 3 x USB 2.0 / 1 x USB 3.0   |
| Serial Ports | 1x RS-232/422/485           |
| Ethernet     | 1 x Realtek Giga Ethernet   |
| Video        | 1 x DVI-I                   |
| Audio        | 1 x Audio output            |
| Expansión    | 2 x Mini-PCIe / 1 x PCIe x1 |

#### Mechanical

|            |                   |
|------------|-------------------|
| Dimensions | 412 x 331 x 92 mm |
| Weight     | 5,8 kg            |
| Mount      | Wall-Mount        |
| Panel cut  | 354 x 288 mm      |

#### Optionals

|              |                                              |
|--------------|----------------------------------------------|
| Screen       | High brightness for outdoors use             |
| USB Ports    | 2 x USB 2.0 / 2 x USB 3.0                    |
| Serial Ports | 3 x RS-232                                   |
| Modem        | 3G / LTE + GPS                               |
| WIFI Module  | Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth |
| Slot PCIe    | To Be Consulted                              |
| Others       | To Be Consulted                              |

#### Protection / Environmental Conditions

|                            |                                        |
|----------------------------|----------------------------------------|
| IP & Material              | IP65 Anodized Aluminum Front Bezel     |
| °C Operation               | 0° a 60° C<br>TBC: -20° a 60° C (Atom) |
| °C Storage                 | -10° a 70° C<br>TBC: -20° a 70° (Atom) |
| Humidity (no condensation) | 0% a 95%                               |

#### Power Supply

|                        |                                   |
|------------------------|-----------------------------------|
| Input Voltage          | 9-36Vdc (External 110-220V/12Vdc) |
| Optional Input Voltage | -                                 |