




IP65 Front Protection

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).

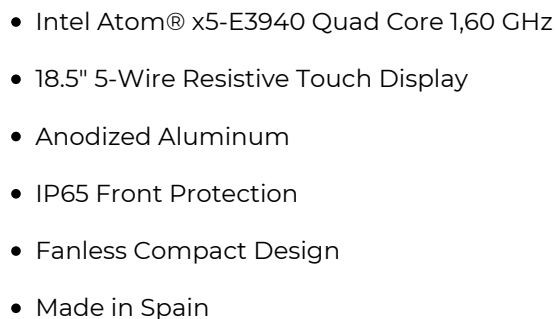

Dimensions



Specifications

Display	
Touch technology	5-Wire Resistive
Inches	18,5"
Format	16:9
Resolution	1366 x 768
Backlight	LED
Brightness	450 cd/m2
Ratio contrast	1000:1
Angle vision	170/160
LED Life Time	50.000 h

System	
CPU	Intel Atom® x5-E3940 Quad Core 1,60 GHz
Memory	2Gb Scalable to 8Gb
Hard Drive	60/120/240GB SSD. 500GB/1TB SATA.
Graphics	Intel® HD Graphics
Chipset	E3940 SoC Processor (TDP 10W/9.5W)
OS	Win10 Pro / Win10 IoT Enterprise / Linux

Input / Ouput	
USB Ports	3 x USB 3.1 / 1 x USB2.0
Serial Ports	-
Ethernet	2 x Intel® Giga Ethernet
Video	1 x HDMI
Audio	1 x Audio output
Expansión	1 x Mini-PCle / 1 x M.2 M-key (2242) / 1 x M.2 B-key (3042)

Mechanical	
Dimensions	501 x 326 x 92 mm
Weight	10 kg
Mount	Wall-Mount
Panel cut	458 x 282 mm

Optionals	
Screen	High brightness for outdoors use
USB Ports	2 x USB 2.0
Serial Ports	1 x RS-232 / 1 x RS-232/422/485
Modem	3G / LTE + GPS
WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
Slot PCIe	To Be Consulted
Others	To Be Consulted

Protection / Environmental Conditions	
IP & Material	IP65 Anodized Aluminum Front Bezel
°C Operation	0° a 60° C TBC: -20° a 60° C (Atom)
°C Storage	-10° a 70° C TBC: -20° a 70° (Atom)
Humidity (no condensation)	0% a 95%

Power Supply	
Input Voltage	9-36Vdc (External 110-220V/12Vdc)
Optional Input Voltage	-