

IRTPPC215HCS3AA
Wall-Mount Panel PC



- Intel® Core™ i3-7100U 2,40 GHz
- 21.5" Projected Capacitive Multitouch Display (PCAP)
- Anodized Aluminum
- IP65 Front Protection
- Compact design
- Made in Spain



Intel®
Processors



Touch Technology



Efficient Power Consumption

Double
Display

IP65 Front Protection


CPU boards with latest generation Intel® Processors,
fanless, low power consumption and exceptional
performance.

IP65 Front Bezel protection, available in Anodized Aluminum or Stainless Steel.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



Dimensions

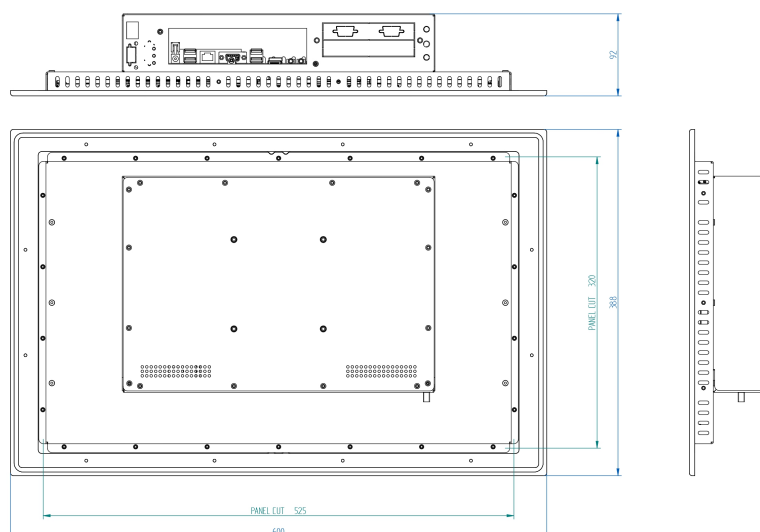

Specifications

Display

Touch technology	Projected Capacitive MultiTouch (PCAP)
Inches	21,5"
Format	16:9
Resolution	1920 x 1080
Backlight	LED
Brightness	1500 cd/m2
Ratio contrast	1000:1
Angle vision	178/178
LED Life Time	50.000 h

System

CPU	Intel® Core™ i3-7100U (7th Generation) 2,40 GHz
Memory	DDR4 2Gb Scalable to 16Gb
Hard Drive	60/120/240GB SSD. 500GB/1TB SATA.
Graphics	Intel® HD Graphics 620
Chipset	i3-7100U Onboard (SoC)
OS	Win10 Pro / Win10 IoT Enterprise / Linux

Input / Ouput

USB Ports	2 x USB 3.0
Serial Ports	-
Ethernet	2 x Realtek Giga Ethernet
Video	1 x VGA / 1 x HDMI
Audio	1 x Audio output / 1 x Microphone
Expansión	1 x Mini-PCle / 1 x M.2(2242/2260) for SSD

Mechanical

Dimensions	600 x 388 x 92 mm
Weight	12 kg
Mount	Wall-Mount
Panel cut	525 x 320 mm

Optionals

Screen	High brightness for outdoors use
USB Ports	3 x USB 2.0 / 2 x USB 3.0
Serial Ports	2 x RS-232 selectable header 5V-12V / 10 x RS-232/422/485
Modem	3G / LTE + GPS
WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
Slot PCIe	To Be Consulted
Others	To Be Consulted

Protection / Environmental Conditions

IP & Material	IP65 Anodized Aluminum Front Bezel
°C Operation	0° a 60° C TBC: -20° a 60° C (Atom)
°C Storage	-10° a 70° C TBC: -20° a 70° (Atom)
Humidity (no condensation)	0% a 95%

Power Supply

Input Voltage	12Vdc (External power supply 110-220Vac/12Vdc)
Optional Input Voltage	-