



- Intel® Celeron® J1900 Quad Core 2,00 GHz
- 21.5" 5-Wire Resistive Touch Display
- Stainless Steel 316L
- IP66 Full Protection
- Fanless compact design
- Made in Spain



Intel®  
Processors



Touch  
Technology



Efficient Power  
Consumption



Double  
Display



IP66 Full  
Enclosure


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

Manufactured in 316L Stainless Steel with full IP66 enclosure. Selection and configuration up to five ports, among COM (serial), USB or Ethernet ports, through IP69 connectors.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

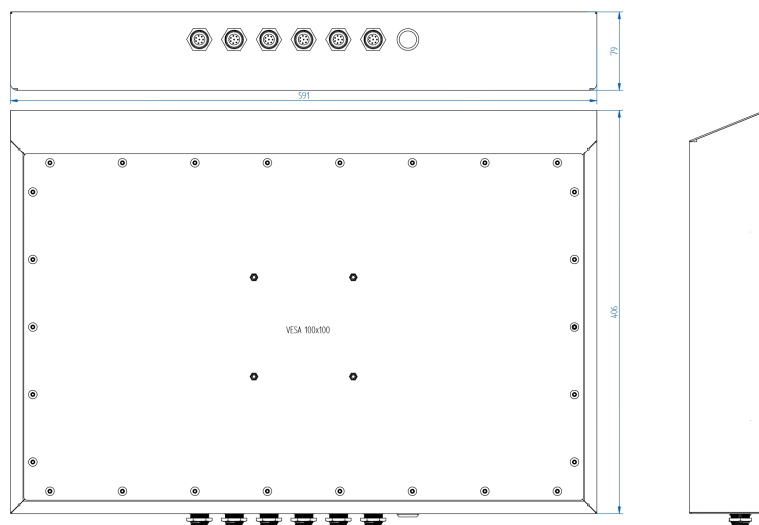

### Specifications

#### Display

Touch technology	5-Wire Resistive
Inches	21,5"
Format	16:9
Resolution	1920 x 1080
Backlight	LED
Brightness	250 cd/m2
Ratio contrast	5000:1
Angle vision	178/178
LED Life Time	30.000 h

#### System

CPU	Intel® Celeron® J1900 Quad Core 2,00 GHz
Memory	2Gb Scalable to 8Gb
Hard Drive	60/120/240GB SSD. 500GB/1TB SATA.
Graphics	Intel® HD Graphics
Chipset	J1900 Onboard (SoC)
OS	Win7 Pro / Win7 Embedded / Win10 Pro / Win10 IoT Enterprise / Linux

#### Input / Ouput

USB Ports	4 x USB 2.0
Serial Ports	-
Ethernet	1 x Realtek Giga Ethernet
Video	1 x VGA / 1 x HDMI
Audio	1 x Audio output / 1 x Microphone
Expansión	2 x Mini-PCIe / 1 x PCIe1

#### Mechanical

Dimensions	591 x 406 x 79 mm
Weight	14,5 kg
Mount	VESA 100 x 100
Panel cut	-

#### Optionals

Screen	High brightness for outdoors use
USB Ports	1 x USB 2.0 / 1 x USB 3.0
Serial Ports	2 x RS-232
Modem	3G / LTE + GPS
WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
Slot PCIe	To Be Consulted
Others	To Be Consulted

#### Protection / Environmental Conditions

IP & Material	Full IP66 Stainless Steel 316L
°C Operation	0° a 60° C TBC: -20° a 60° C (Atom)
°C Storage	-10° a 70° C TBC: -20° a 70° (Atom)
Humidity (no condensation)	0% a 95%

#### Power Supply

Input Voltage	12Vdc (External power supply 110-220Vac/12Vdc)
Optional Input Voltage	-