





- Intel® Celeron™ J6412 Quad Core 2,00 GHz
- 18.5" Projected Capacitive Multitouch Display (PCAP)
- Aluminum
- Made in Spain
- Fanless compact design



CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.  
Manufactured in Aluminium.  
Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

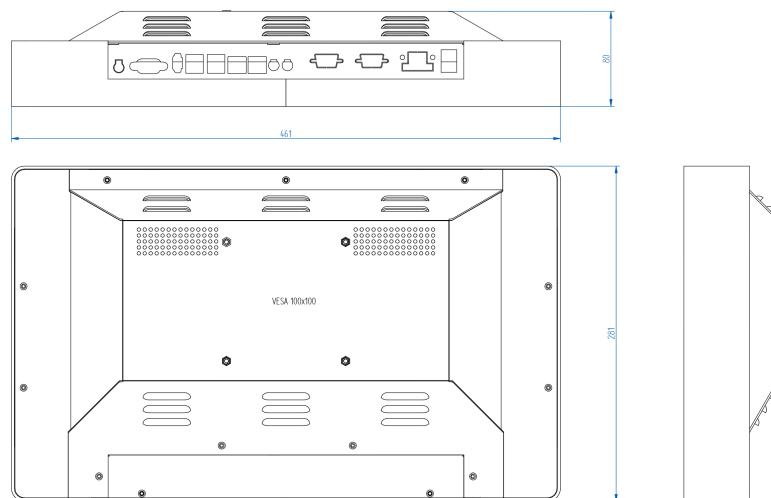

### Specifications

#### Display

|                  |  |
|------------------|--|
| Touch technology | Projected Capacitive MultiTouch (PCAP) |
| Inches           | 18,5"                                  |
| Format           | 16:9                                   |
| Resolution       | 1920 x 1080                            |
| Backlight        | LED                                    |
| Brightness       | 450 cd/m2                              |
| Ratio contrast   | 1000:1                                 |
| Angle vision     | 178/178                                |
| LED Life Time    | 50.000 h                               |

#### System

|            |  |
|------------|--|
| CPU        | Intel® Celeron™ J6412 Quad Core 2,00 GHz |
| Memory     | DDR4 2Gb Scalable to 16Gb                |
| Hard Drive | 60/120/240/480Gb SSD. 500Gb/1Tb SATA.    |
| Graphics   | Intel® HD Graphics                       |
| Chipset    | J6412 Onboard (SoC)                      |
| OS         | Win10 Pro / Win10 IoT Enterprise / Linux |

#### Input / Ouput

|              |  |
|--------------|--|
| USB Ports    | 2 x USB 2.0 / 3 x USB 3.1                                  |
| Serial Ports | -  |
| Ethernet     | 2 x Intel® Giga Ethernet                                   |
| Video        | 1 x HDMI   |
| Audio        | 1 x Audio output / 1 x Microphone                          |
| Expansión    | 1 x M.2 (2242/2260) / 1 x M.2 (2230) / 1 x M.2 (3042/3052) |

#### Mechanical

|            |                   |
|------------|-------------------|
| Dimensions | 461 x 281 x 80 mm |
| Weight     | 6 kg              |
| Mount      | VESA 100 x 100    |
| Panel cut  | -                 |

#### Optionals

|              |  |
|--------------|--|
| Screen       | High brightness for outdoors use             |
| USB Ports    | 3 x USB 2.0                                  |
| Serial Ports | 4 x RS-232 / 2 x RS-232/422/485              |
| Modem        | 3G / LTE + GPS                               |
| WIFI Module  | Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth |
| Slot PCIe    | To Be Consulted                              |
| Others       | To Be Consulted                              |

#### Protection / Environmental Conditions

|                            |                                    |
|----------------------------|------------------------------------|
| IP & Material              | Double Height Aluminum Front Panel |
| °C Operation               | 0° a 60° C                         |
| °C Storage                 | -10° a 70° C                       |
| Humidity (no condensation) | 0% - 95%                           |

#### Power Supply

|                        |  |
|------------------------|--|
| Input Voltage          | 12Vdc (External power supply 110-220Vac/12Vdc) |
| Optional Input Voltage | -  |